

Conductivity/Resistivity Measurement OLM223/253

Transmitter for conductive and inductive sensors



Application

The modular design of the OLM223/253 allows easy adaption of the transmitter to a variety of customer requirements. Starting with the basic version for "measurement and alarm generation", the transmitter can be equipped with additional software and hardware modules for special applications. These modules can also be retrofitted as required.

Areas of Application

- Ultrapure water
- Water treatment
- Ion exchanger, reverse osmosis
- Cooling water desalination
- Sewage

Your benefits

- Field or panel-mounted housing
- Universal application
- Simple handling
 - Logically arranged menu structure
 - Ultrasimple two-point calibration
- Safe operation
 - Overvoltage (lightning) protection
 - Direct access for manual contact control
 - User-defined alarm configuration

The basic unit can be extended with:

- 2 or 4 additional contacts for use as:
 - Limit contacts (also for temperature)
 - P(ID) controller
 - Timer for simple rinse processes
 - Complete cleaning with Chemoclean
- Plus package:
 - User defined current output characteristics
 - Automatic cleaning trigger on alarm or limit violation
 - Ultrapure water monitoring acc. to USP (United States Pharmacopeia) and EP (European Pharmacopoeia) (conductive)
 - Polarisation detection (conductive)
 - Concentration measurement
 - Temperature compensation via table
 - Process Check System (PCS): live check of the sensor
 - Adaptive calibration with installation factor (inductive)
- HART® or PROFIBUS-PA/-DP
- 2nd current output for temperature, main measured value or actuating variable
- Current input for flow rate monitoring with controller shut off or for feedforward control

Function and system design

Features of the basic version

Conductive or inductive

Two instrument versions for measurement with conductive (two electrode) sensors or inductive sensors are available. The use of inductive sensors that are less sensitive to soiling than conductive sensors is recommended for high conductivity measurement, concentration measurement or adhering media.

Measuring of conductivity and resistivity (conductive)

This is selected via the menu. During measurement, the value measured can be displayed in the other measuring mode. The temperature is displayed at the same time or, if desired, not shown at all.

Temperature compensation

The following temperature compensation selections are available:

- Linear
- NaCl curve according to IEC 746
- Ultrapure water NaCl (neutral compensation)
- Ultrapure water HCl (acid compensation, also ammonia)

The **reference temperature** is user defined, the standard value is 25 °C (77 °F).

Configuration

Different alarms are required depending on application and operator. Therefore the transmitter permits independent **configuration of the alarm contact and error current** for each individual error. Unnecessary or undesirable alarms can be suppressed in this manner. **Up to four contacts** can be used as limit contacts (also for temperature), to implement a P(ID) controller or for cleaning functions.

Direct **manual operation of the contacts** (bypassing the menu) provides quick access to limit, control or cleaning contacts, permitting speedy correction of deviations.

The **serial numbers** of the instrument and modules and the order code can be called up on the display.

The cell constant can be edited and even **calibrated** for demanding special applications.

Additional functions of the plus package

Current output configuration

In order to output wide measuring ranges while still achieving a high resolution in specific ranges, the **current output** can be configured as required via a table. This permits **bilinear** or **quasi-logarithmic** curves, etc.

Polarisation detection

Polarisation effects in the boundary layer between the sensor and the medium to be measured limit the measuring range of conductive conductivity sensors.

The transmitter can detect polarisation effects using an innovative, intelligent signal evaluation process.

Process Check System (PCS)

This function checks the measuring signal for stagnation. If the measuring signal does not change for some time (several measured values), an alarm is triggered. Soiling, blockage or similar could be the cause of such behaviour.

Ultrapure water monitoring acc. to USP (United States Pharmacopeia) and EP (European Pharmacopoeia)

Ultrapure water monitoring according to USP <645> and EP means that the uncompensated conductivity and the temperature are measured and compared to a table.

The transmitter (conductive with additional contacts) comes with the following functions:

- Monitoring of "Water for Injection" (WFI) according to USP and EP
- Monitoring of "Highly Purified Water" (HPW) according to EP
- Monitoring of "Purified Water" (PW) according to EP

The **user-adjustable pre-alarm** indicates undesirable operating values in due time. Full compliance with USP or EP requires the use of a precisely calibrated sensor, for example, the OLS16.

Concentration measuring

The conversion from conductivity to concentration is effected using four user-definable **concentration curves**. This permits concentrations to be displayed in %, ppm, mg/l or TDS (total dissolved solids).

Adaptive calibration for determination of the installation factor (inductive)

Inductive measuring sensors must normally be installed in pipes at a required minimum distance from the pipe wall. If this minimum distance is not observed, the measured value changes. The built-in adaptive calibration using the installation factor allows you to compensate for this once the sensor is installed.

Second current output The second current output can be configured for temperature, main measured value (conductivity, resistivity, concentration) or actuating variable.

Current input The current input of the transmitter allows two different applications: controller shut-down in case of lower flow rate violation or total failure in the main flow as well as feedforward control. Both functions are also combinable.

Explosion proof versions for zone 2 Application of transmitter and sensor in hazardous area zone 2 Field housing OLM253 with power supply 24 V

Application of transmitter as related electrical equipment in non-hazardous area or in simple or pressurised apparatus; application of sensor in hazardous area zone 2 Panel mounted housing OLM223 with power supply 230 V or 24 V

Remarks:


- Permissible sensors: all conductive conductivity sensors, inductive sensors OLS50 (Non-Ex version) and OLS52.
- Do not use blue sensor cables. Electric circuits are not intrinsically safe according to EN 50039.

Measuring system

A complete measuring systems comprises:

- The transmitter OLM223 or OLM253
- A sensor with or without an integrated temperature sensor
- A measuring cable OYK71 (conductive), OPK9 for OLS16 or OLK5 (inductive)

Options: extension cable, junction box VBM

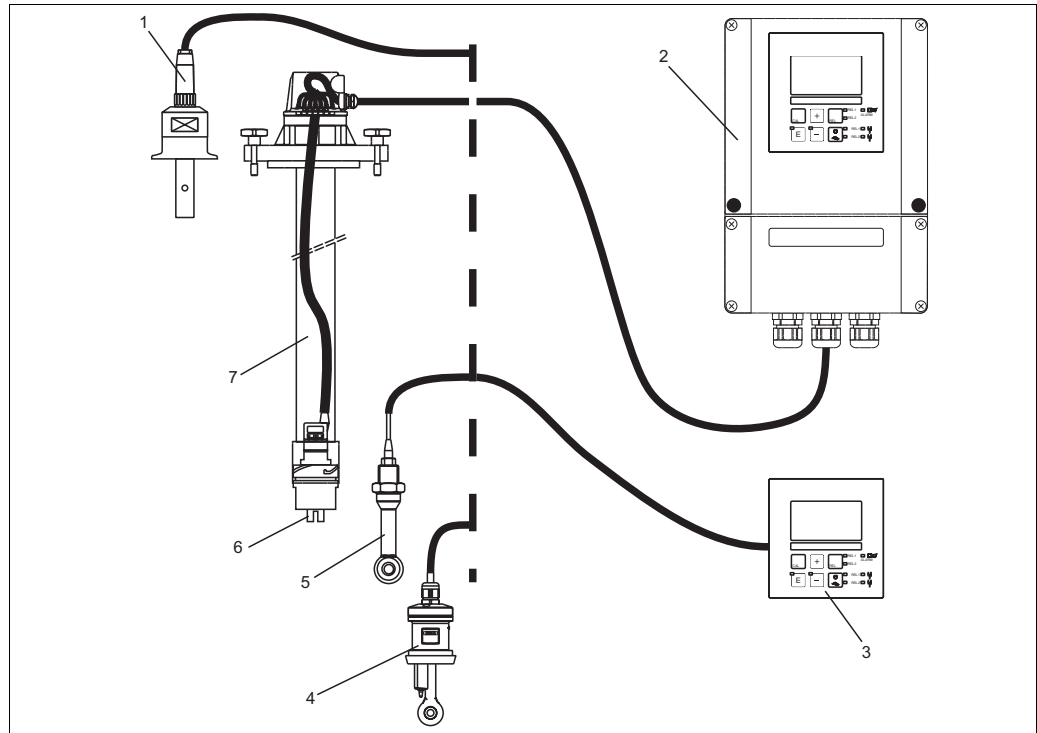

C07-OLM2x3xx-14-06-00-xx-001.eps

Complete measuring system OLM223/253

1 *Conductive sensor OLS15*

2 *OLM253*

3 *OLM223*

4 *Inductive sensor OLS52*

5 *Inductive sensor OLS50*

6 *Conductive sensor OLS21*

7 *Immersion assembly OLA111*

Input

| | | |
|----------------------------|---|--|
| Measured variables | Conductivity, resistivity, temperature | |
| Measuring range | Conductivity (conductive): Conductivity (inductive): Resistivity: Concentration: Temperature: | 0 ... 60 mS/cm (uncompensated) 0 ... 2000 mS/cm (uncompensated) 0 ... 200 M Ω ·cm 0 ... 9999 (% , ppm, mg/l, TDS) -35 ... +250 °C (-31 ... +482 °F) |
| Cable specification | Cable length (conductive): Cable length (inductive): Cable resistance OYK71: | conductivity: max. 100 m (328.1 ft) (OYK71) resistivity: max 15 m (49.22 ft) (OYK71) max 55 m (180.46 ft) (OLK5) 165 Ω /km (conductivity measurement) |
| Cell constant | Adjustable cell constant: | k = 0.0025 ... 99.99 cm ⁻¹ |
| Temperature sensors | Pt 100, Pt 1000, NTC 30K | |
| Measuring frequency | Conductivity, resistivity (conductive): Conductivity (inductive): | 170 Hz ... 2 kHz 2 kHz |
| Binary inputs | Voltage: Power consumption: | 10 ... 50 V max. 10 mA |
| Current input | 4 ... 20 mA, galvanically separated Load: 260 Ω at 20 mA (voltage drop 5.2 V) | |


Output

| | | |
|---|--|--|
| Current range | 0/4 ... 20 mA, galvanically separated, active | |
| Error current | 2.4 or 22 mA in case of an error | |
| Load | maximum 500 Ω | |
| Linearisation transmission behaviour | Conductivity: Resistivity: Concentration: Actuating variable: Temperature: | adjustable adjustable adjustable adjustable adjustable |
| Resolution | max. 700 digits/mA | |

| | | |
|---|--|--|
| Min. distance for 0 / 4 ... 20 mA signal | Conductivity: | |
| | Measured value 0 ... 1.999 $\mu\text{S/cm}$ | 0.2 $\mu\text{S/cm}$ |
| | Measured value 0 ... 19.99 $\mu\text{S/cm}$ | 2 $\mu\text{S/cm}$ |
| | Measured value 20 ... 199.9 $\mu\text{S/cm}$ | 20 $\mu\text{S/cm}$ |
| | Measured value 200 ... 1999 $\mu\text{S/cm}$ | 200 $\mu\text{S/cm}$ |
| | Measured value 2 ... 19.99 mS/cm | 2 mS/cm |
| | Measured value 20 ... 2000 mS/cm | 20 mS/cm |
| | Resistivity | |
| | Measured value 0 ... 199.9 $\text{k}\Omega\cdot\text{cm}$ | 20 $\text{k}\Omega\cdot\text{cm}$ |
| | Measured value 200 ... 1999 $\text{k}\Omega\cdot\text{cm}$ | 200 $\text{k}\Omega\cdot\text{cm}$ |
| Measured value 2 ... 19.99 $\text{M}\Omega\cdot\text{cm}$ | 2.0 $\text{M}\Omega\cdot\text{cm}$ | |
| Measured value 20 ... 200 $\text{M}\Omega\cdot\text{cm}$ | 20 $\text{M}\Omega\cdot\text{cm}$ | |
| Concentration | no minimum distance | |
| Temperature | 15 °C | |
| Isolation voltage | max. 350 $V_{\text{RMS}}/500$ V DC | |
| Overvoltage protection | according to EN 61000-4-5 | |
| Auxiliary voltage output | Output voltage: | 15 V \pm 0.6 |
| | Output current: | max. 10 mA |
| Contact outputs | Switching current with ohmic load ($\cos \varphi = 1$): | max. 2 A |
| | Switching current with inductive load ($\cos \varphi = 0.4$): | max. 2 A |
| | Switching voltage: | max. 250 V AC, 30 V DC |
| | Switching power with ohmic load ($\cos \varphi = 1$): | max. 500 VA AC, 60 W DC |
| | Switching power with inductive load ($\cos \varphi = 0.4$): | max. 500 VA AC, 60 W DC |
| Limit contactor | Pickup/dropout delay: | 0 ... 2000 s |
| Controller | Function (adjustable): | pulse length/pulse frequency controller |
| | Controller response: | PID |
| | Control gain K_p : | 0.01 ... 20.00 |
| | Integral action time T_i : | 0.0 ... 999.9 min |
| | Derivative action time T_v : | 0.0 ... 999.9 min |
| | Period for pulse length controller: | 0.5 ... 999.9 s |
| | Frequency for pulse frequency controller: | 60 ... 180 min^{-1} |
| Basic load: | 0 ... 40% of max. set value | |
| Alarm | Function (selectable): | Latching/momentary contact |
| | Alarm threshold adjustment range: | Conductivity, resistivity, concentration, temperature, USP, EP: complete measuring range |
| | Alarm delay: | 0 ... 2000 s (min) |

Power supply

Electrical connection

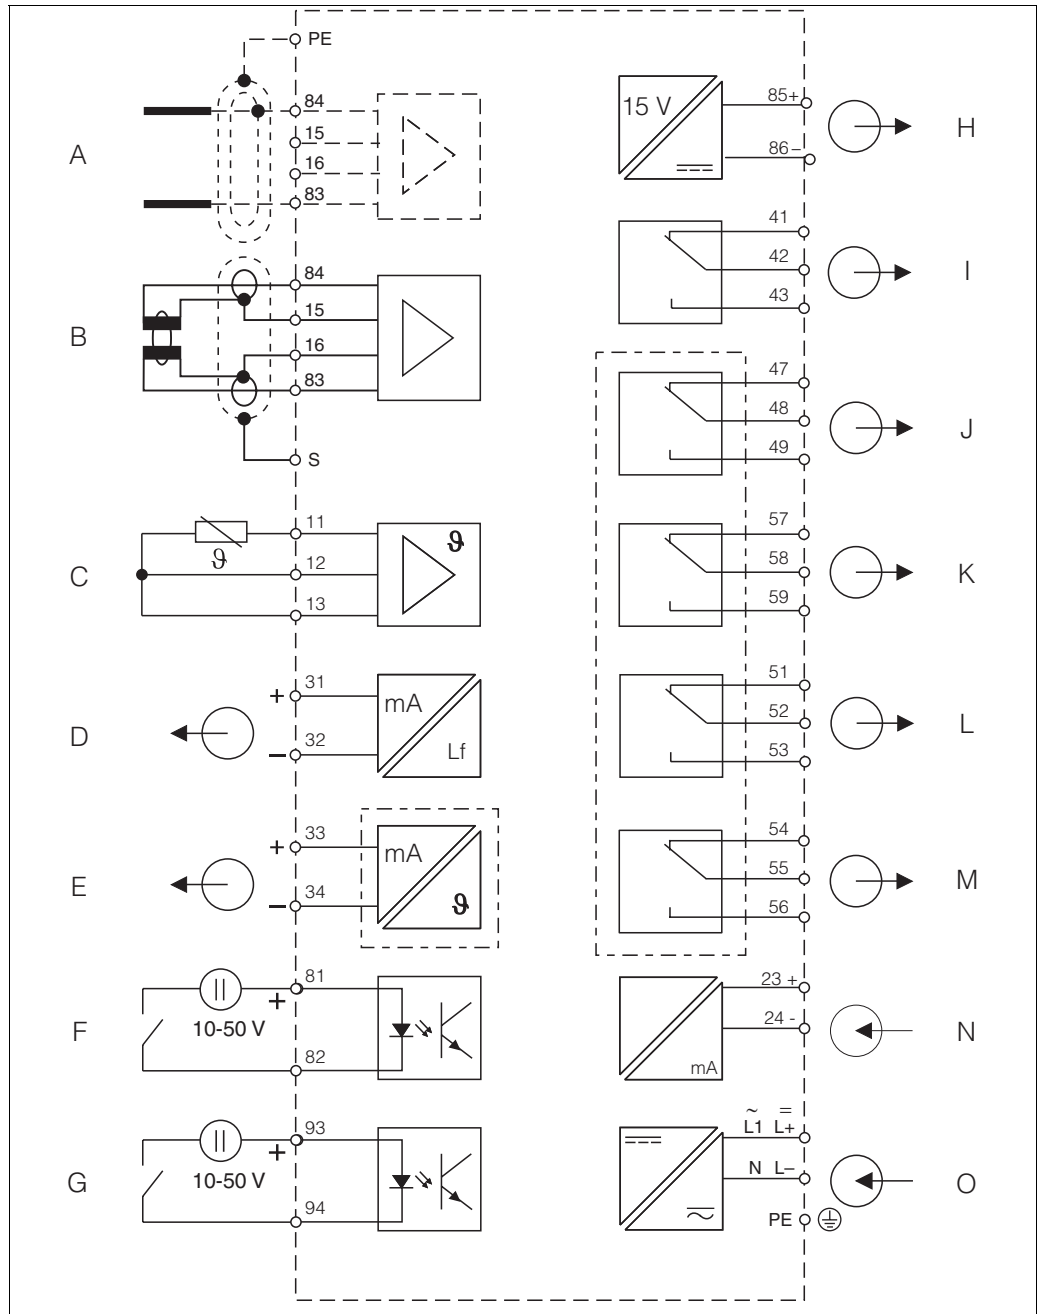


C07-OLM2x3xx-04-06-00-xx-001.eps

Electrical connection of the transmitter


- | | | | |
|---|------------------------------|---|---|
| A | Sensor (conductive) | I | Alarm (current-free contact position) |
| B | Sensor (inductive) | J | Relay 1 (current-free contact position) |
| C | Temperature sensor | K | Relay 2 (current-free contact position) |
| D | Signal output 1 conductivity | L | Relay 3 (current-free contact position) |
| E | Signal output 2 variable | M | Relay 4 (current-free contact position) |
| F | Binary input 1 (Hold) | N | Current input 4 ... 20 mA |
| G | Binary input 2 (Chemoclean) | O | Power supply |
| H | Aux. voltage output | | |

The instrument has protection class II and is generally operated without protective earth connection. To ensure the measuring stability and the function for conductive sensors you have to connect the outer screen of the sensor cable to the PE terminal.

Connection of sensor You require screened special measuring cables to connect conductivity sensors to the transmitter. To extend the measuring cable, use junction box and extension cable (see accessories).

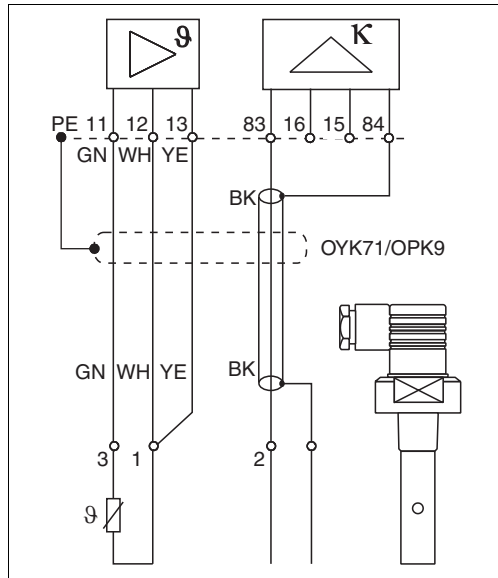

Connection of conductive sensors

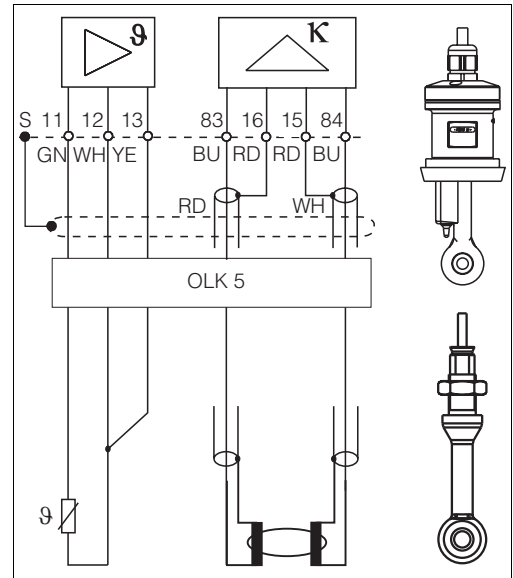

Connection of inductive sensors

Power supply Depending on ordered version:
100/115/230 V AC +10/-15 %, 48 ... 62 Hz
24 V AC/DC +20/-15 %

Power consumption max. 7.5 VA

Mains protection Fine-wire fuse, medium-slow blow 250 V/3.15 A

Performance characteristic

Reference temperature 25 °C (77 °F); adjustable for the compensation of the medium temperature

Resolution Conductivity: depending on the measuring range: 0.001 µS/cm to 1.999 µS/cm and $k \leq 0.5 \text{ cm}^{-1}$
Temperature: 0.1 °C

Deviation of indication Conductivity:
Display: max. 0.5 % of measured value ± 4 digits
Conductivity signal output: max. 0.75 % of current output range
Resistivity:
Display: max. 0.5 % of measured value ± 4 digits
Resistivity signal output: max. 0.75 % of current output range
Temperature:
Display: max. 1.0 % of measuring range
Temperature signal output: max. 1.25 % of current output range


Repeatability^a Conductivity: max. 0.2 % of measured value ± 2 digits
Resistivity: max. 0.2 % of measured value ± 2 digits

Temperature compensation Range: -35 ... +250 °C (-31 ... +482 °F)
Types of compensation: uncompensated, linear, NaCl, table;
conductive only: ultrapure water NaCl, ultrapure water HCl

Temperature offset ±5 °C; for the adjustment of the temperature display


Installation conditions

Installation instructions

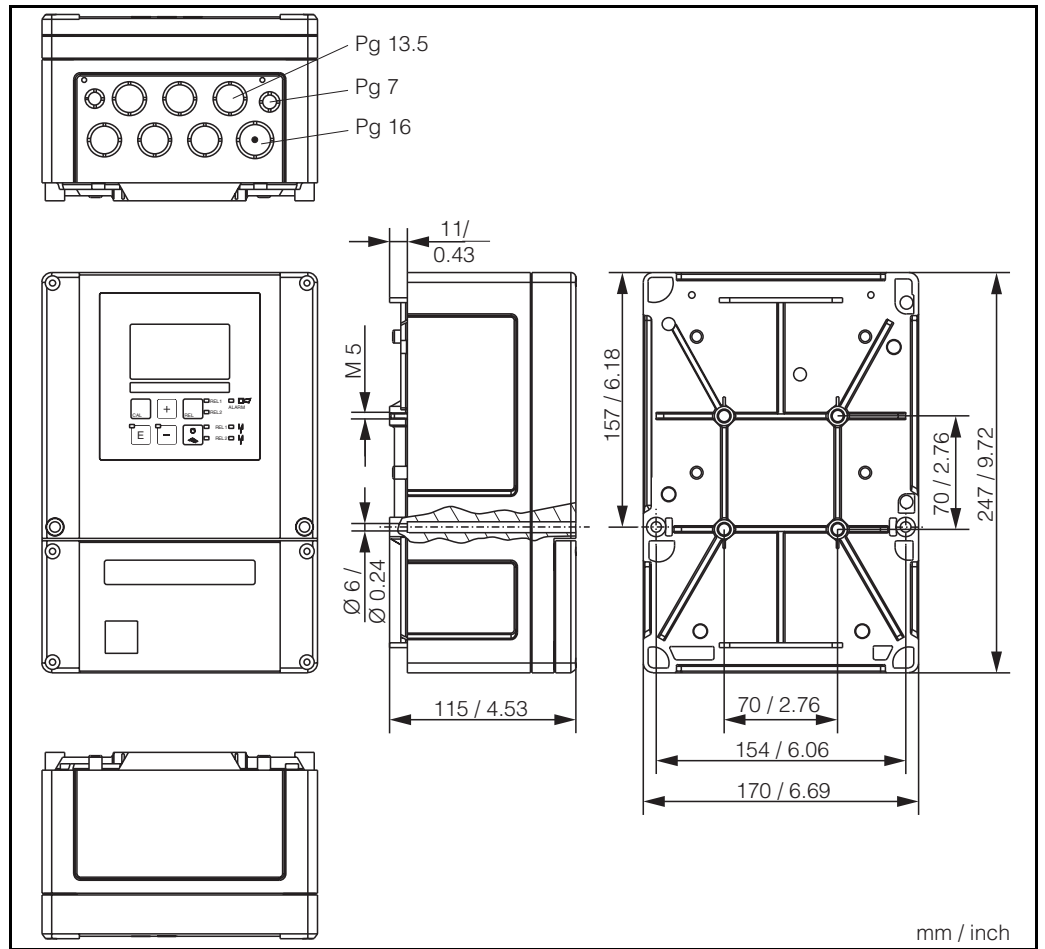


C07-OxM253xx-08-06-00-en-001.EPS

Field instrument

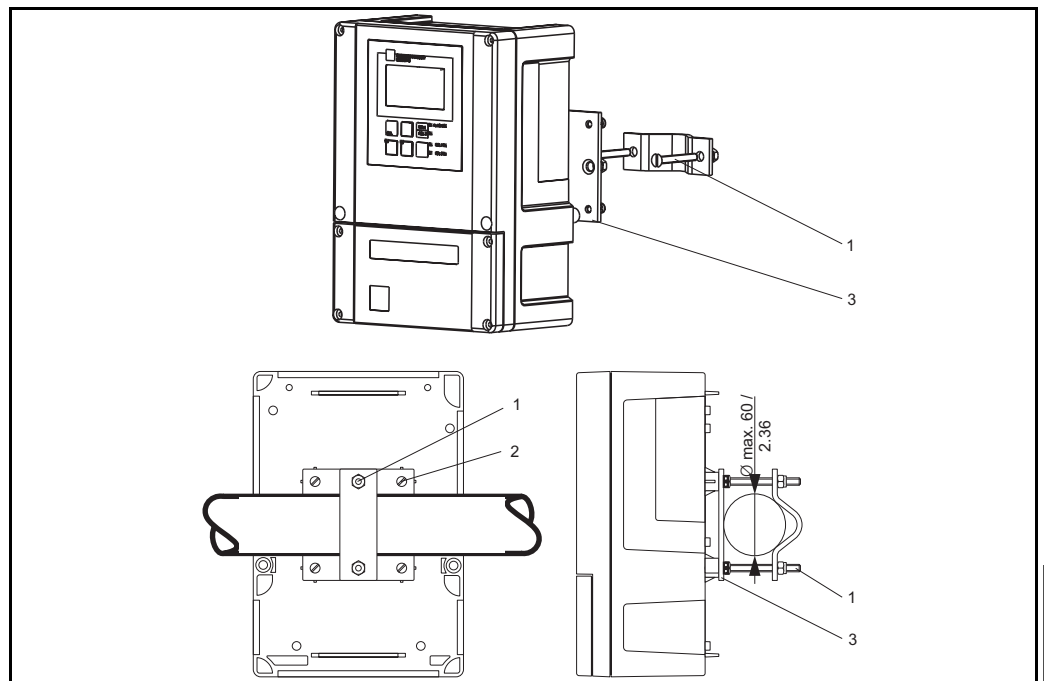

C07-OxM253xx-11-06-00-en-003.EPS


Mounting on pipes

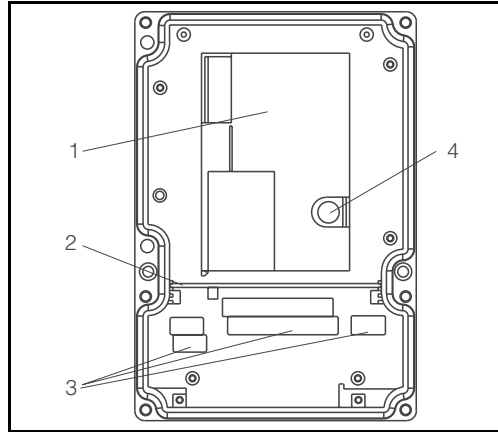

- 1 Removable electronics box
- 2 Partition plate
- 3 Terminal blocks
- 4 Fuse

C07-OxM253xx-11-06-00-xx-001.EPS


Inside of field instrument

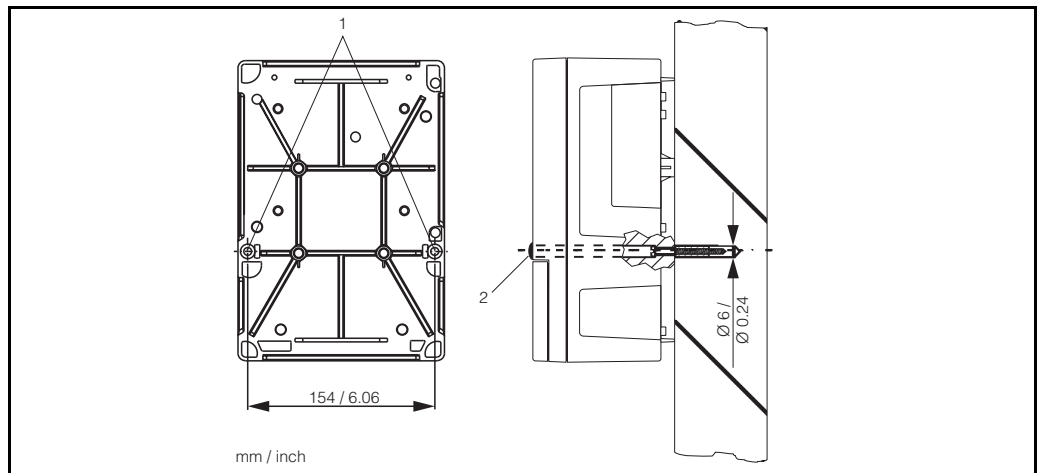

C07-OxM253xx-11-06-00-en-002.EPS

Wall mounting of the field instrument


- 1 Mounting holes
- 2 Protecting cap

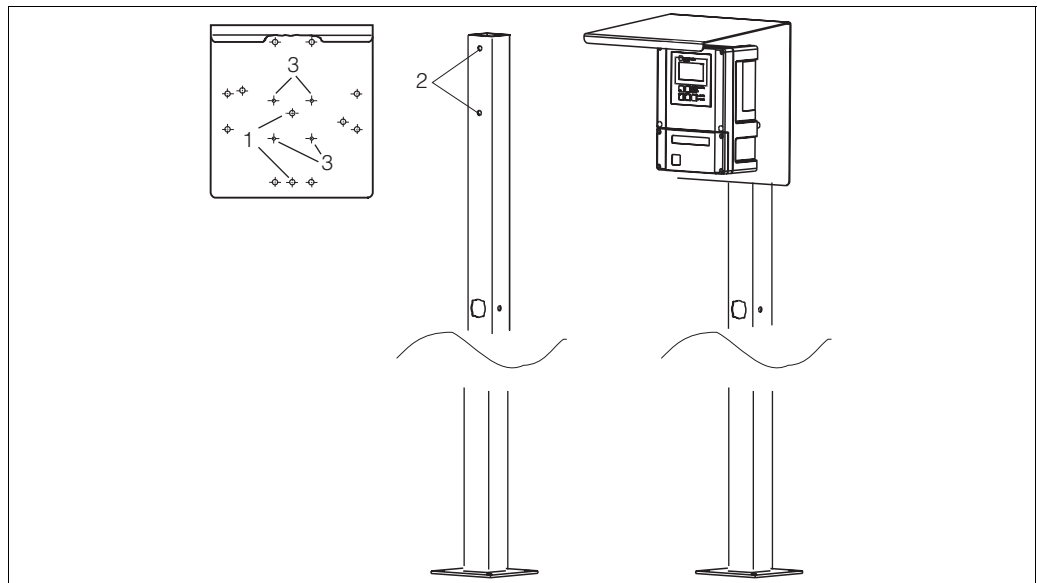

C07-OxM253xx-11-06-00-xx-004.EPS


Mounting of the field instrument with mounting post and weather protection cover

- 1 -3 Mounting holes

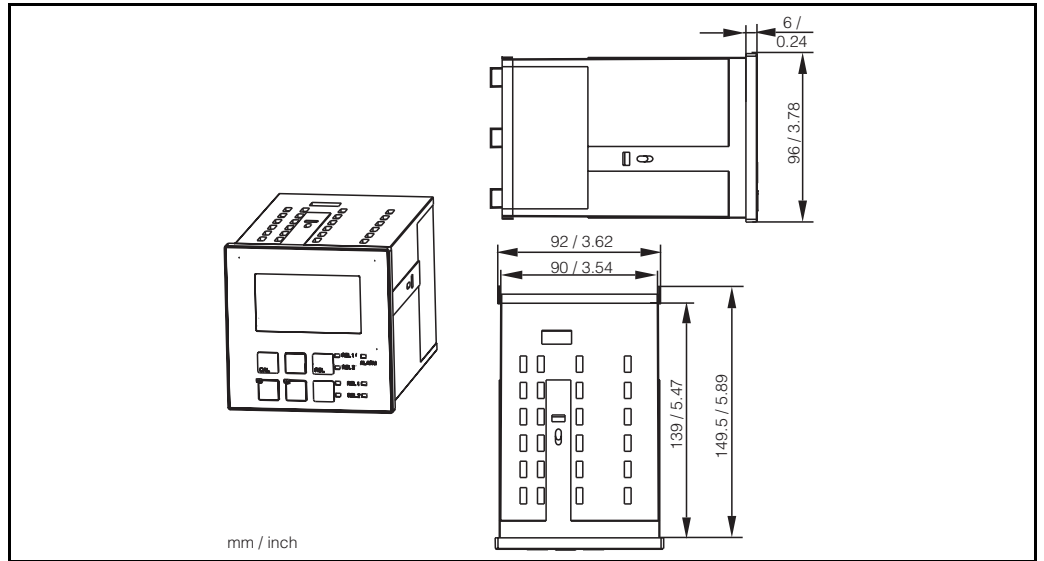

C07-OxM223xx-08-08-00-en-001.EPS

Dimensions panel-mounted instrument

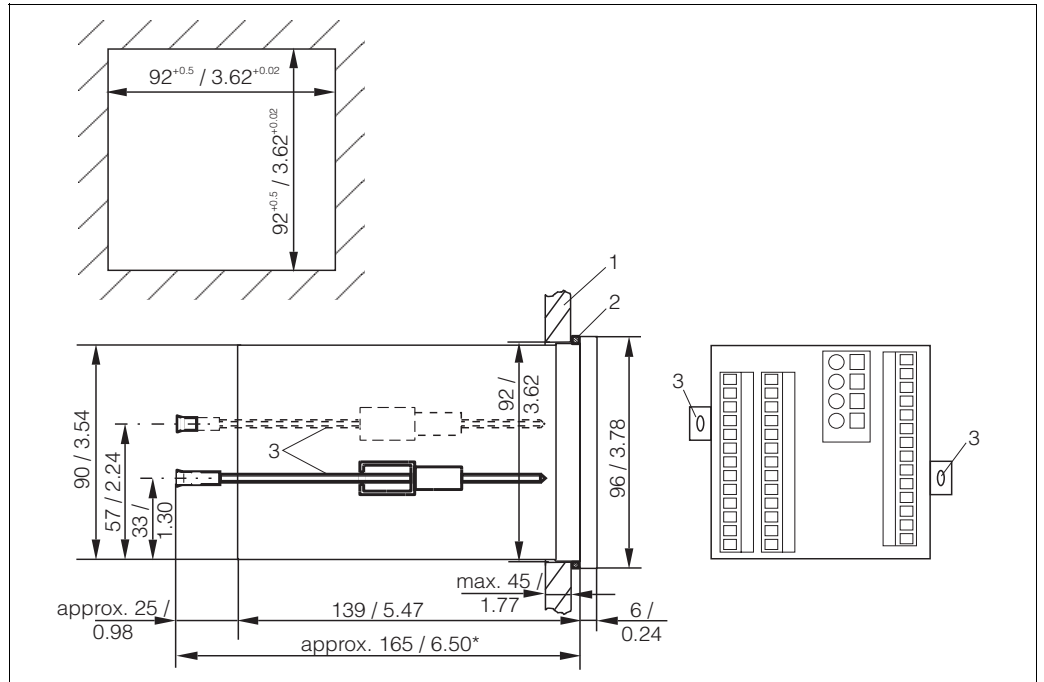

C07-OxM223xx-11-06-00-en-001.EPS

Installation of the panel mounted instrument

- 1 Wall of control cabinet
- 2 Gasket
- 3 Tensioning screws
- * Required installation depth

Environment


| | | |
|--|---|---|
| Ambient temperature | -10 ... +55 °C (+14 ... +131 °F) | |
| Ambient temperature limit | -20 ... +60 °C (-4 ... +140 °F) | |
| Storage and transport temperature | -25 ... +65 °C (-13 ... +149 °F) | |
| Electromagnetic compatibility | Interference emission and interference immunity acc. to EN 61326: 1997 / A1: 1998 | |
| Ingress protection | Panel mounted instrument: Field instrument: | IP 54 (front), IP 30 (housing) IP 65 |
| Relative humidity | 10 ... 95%, non-condensing | |

Mechanical construction

| | | |
|-------------------|--------------------------------------|--|
| Dimensions | Panel mounted instrument: | 96 x 96 x 145 mm (3.78 x 3.78 x 5.71 inches) Installation depth: approx. 165 mm (6.50") |
| | Field instrument: | 247 x 170 x 115 mm (9.72 x 6.69 x 4.53 inches) |
| Weight | Panel mounted instrument: | max. 0.7 kg (1.5 lb) |
| | Field instrument: | max. 2.3 kg (5.1 lb) |
| Materials | Housing of panel mounted instrument: | Polycarbonate |
| | Field housing: | ABS PC Fr |
| | Front membrane: | Polyester, UV-resistant |
| Terminals | Cross section | max. 2.5 mm ² |

Human interface

Display elements

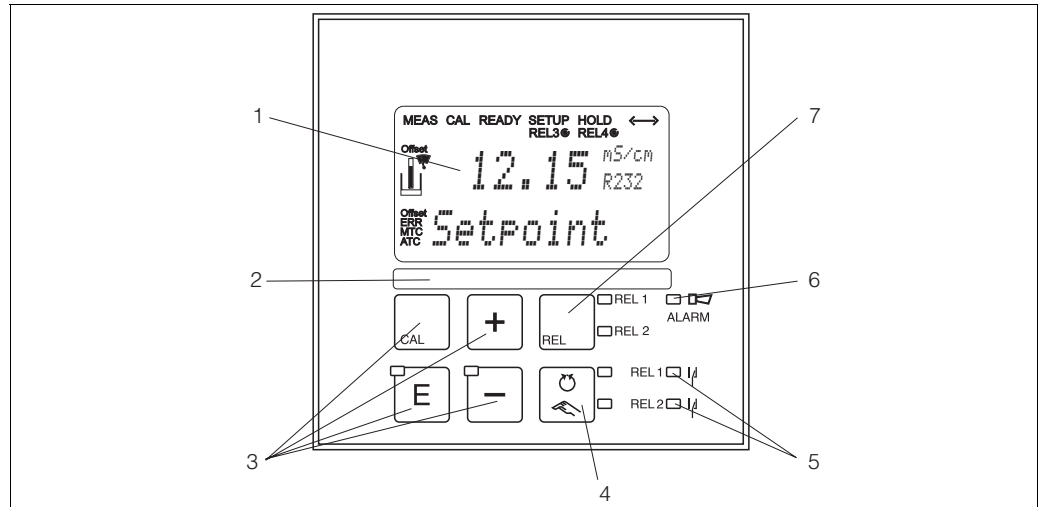

C07-OLM2x3xx-19-06-00-en-001.eps

Operating elements

- 1 LC display for display of measured values, configuration data and current menu field
- 2 Field for user labeling
- 3 4 main control keys for calibration and instrument configuration
- 4 Key for switching between automatic/manual operation of the relays
- 5 LED indicators for limit contactor relay (switch status)
- 6 LED indicator for alarm function
- 7 Display of active contact and key for relay switching in manual mode

The display simultaneously shows the current measured value and the temperature - the essential process data. Brief information texts in the configuration menu provide assistance with parameter configuration.

Instrument control functions

All instrument control functions are arranged in a logical menu structure. Following access code entry, the individual parameters can be easily selected and modified as needed.

Certificates and approvals

CE symbol

Declaration of conformity

The product meets the legal requirements of the harmonized European standards. The manufacturer confirms compliance with the standards by affixing the CE symbol.

Ex approval for zone 2

Explosion protection for Zone 2

| | |
|---------------|-----------------------------|
| OLM253-..6... | ATEX II 3G EEx nA[L] IIC T4 |
| OLM253-..4... | ATEX II 3G [EEx nAL] IIC |
| OLM223-..4... | |
| OLM223-..6... | |

Ordering information

Product structure

| | | Version | |
|---------|----|---|---------------------|
| | CD | Conductivity/resistivity measurement (conductive two-electrode sensor) | |
| | CS | Conductivity/resistivity measurement (conductive two-electrode sensor) with additional functions (Plus package) | |
| | ID | Conductivity measurement (inductive sensor) | |
| | IS | Conductivity measurement (inductive sensor) with additional functions (Plus package) | |
| | | Power supply; approval | |
| | 0 | 230 V AC | |
| | 1 | 115 V AC | |
| | 2 | 230 V AC; CSA Gen. Purp. | |
| | 3 | 115 V AC; CSA Gen. Purp. | |
| | 4 | 230 V AC; ATEX II 3G [EEx nAL] IIC | |
| | 5 | 100 V AC | |
| | 6 | 24 V AC/DC; ATEX II 3G [EEx nAL] IIC for OLM223, EEx nA[L] IIC T4 for OLM253 | |
| | 7 | 24 V AC/DC; CSA Gen. Purp. | |
| | 8 | 24 V AC/DC | |
| | | Output | |
| | 0 | 1 x 20 mA, conductivity/resistivity | |
| | 1 | 2 x 20 mA, conductivity/resistivity and temperature/main measured value/actuating variable | |
| | 3 | PROFIBUS PA | |
| | 4 | PROFIBUS DP | |
| | 5 | 1 x 20 mA, conductivity/resistivity HART® | |
| | 6 | 2 x 20 mA, conductivity/resistivity HART® and temp./main measured value/actuating variable | |
| | | Additional contacts; analogue input | |
| | 05 | Not selected | |
| | 10 | 2 x relay (limit/controller/timer) | |
| | 15 | 4 x relay (limit/controller/Chemoclean) | |
| | 16 | 4 x relay (limit/controller/timer) | |
| | 20 | 2 x relay (limit/controller/timer); current input | |
| | 25 | 4 x relay with cleaning (limit/controller/timer/Chemoclean); current input | |
| | 26 | 4 x relay with timer (limit/controller/timer); current input | |
| OLM253- | | | |
| | | | |
| OLM223- | | | |
| | | | complete order code |

Additional functions of the Plus package

- Current output table to cover large areas with varying resolution, fields O33x
- Process Check System (PCS): live check of the sensor, function group P
- Ultrapure water monitoring for "Water for injection" (WFI) and "Purified water" (PW) acc. to United States Pharmacopeia (USP) and European Pharmacopoeia (EP) with pre-alarm (conductive, additional contacts necessary), fields R26x and R27x
- Polarisation detection (conductive), function group P
- Concentration measurement, function group K
- Temperature compensation via coefficient table, function group T
- Adaptive calibration with installation factor (inductive), fields C13x
- Automatic cleaning function start, field F8

Scope of delivery

The delivery of the field instrument includes:

- 1 transmitter OLM253
- 1 plug-in screw terminal
- 1 cable gland Pg 7
- 1 cable gland Pg 16 reduced
- 2 cable glands Pg 13.5
- 1 operating instructions BA 193e00
- versions with HART communication:
 - 1 operating instructions Field Communication with HART, BA 208e00
- versions with PROFIBUS communication:
 - 1 operating instructions Field Communication with PROFIBUS PA/DP, BA 209e00
- versions with explosion protection for hazardous area zone II (ATEX II 3G):
 - Safety instructions for use in explosion-hazardous areas, XA 194a300

The delivery of the panel mounted instrument includes:

- 1 transmitter OLM223
- 1 set of plug-in screw terminals
- 2 tensioning screws
- 1 operating instructions BA 193e00
- versions with HART communication:
 - 1 operating instructions Field Communication with HART, BA 208e00
- versions with PROFIBUS communication:
 - 1 operating instructions Field Communication with PROFIBUS PA/DP, BA 209e00
- versions with explosion protection for hazardous area zone II (ATEX II 3G):
 - Safety instructions for use in explosion-hazardous areas, XA 194a300


Accessories

Sensors

- OLS12
Conductive conductivity sensor for standard, Ex and high temperature applications;
Ordering acc. to version, see Technical Information
- OLS13
Conductive conductivity sensor for standard, Ex and high temperature applications;
Ordering acc. to version, see Technical Information
- OLS15
Conductive conductivity sensor for pure and ultra-pure water applications (incl. Ex);
Ordering acc. to version, see Technical Information
- OLS16
Hygienic conductive conductivity sensor for pure and ultra-pure water applications (incl. Ex);
Ordering acc. to version, see Technical Information
- OLS19
Conductive conductivity sensor for pure and ultra-pure water applications;
Ordering acc. to version, see Technical Information
- OLS21
Conductive conductivity sensor for applications with middle to high conductivity
(incl. Ex); Ordering acc. to version, see Technical Information
- OLS50
Inductive conductivity sensor for standard, Ex and high temperature applications;
Ordering acc. to the sensor version, see Technical Information
- OLS52
Inductive conductivity sensor with short response time in hygienic design;
Ordering acc. to the sensor version, see Technical Information


Assemblies

- OLA111 immersion and process assembly
For open and closed tanks with DN 100 flange,
for ordering information, see Technical Information OLA111

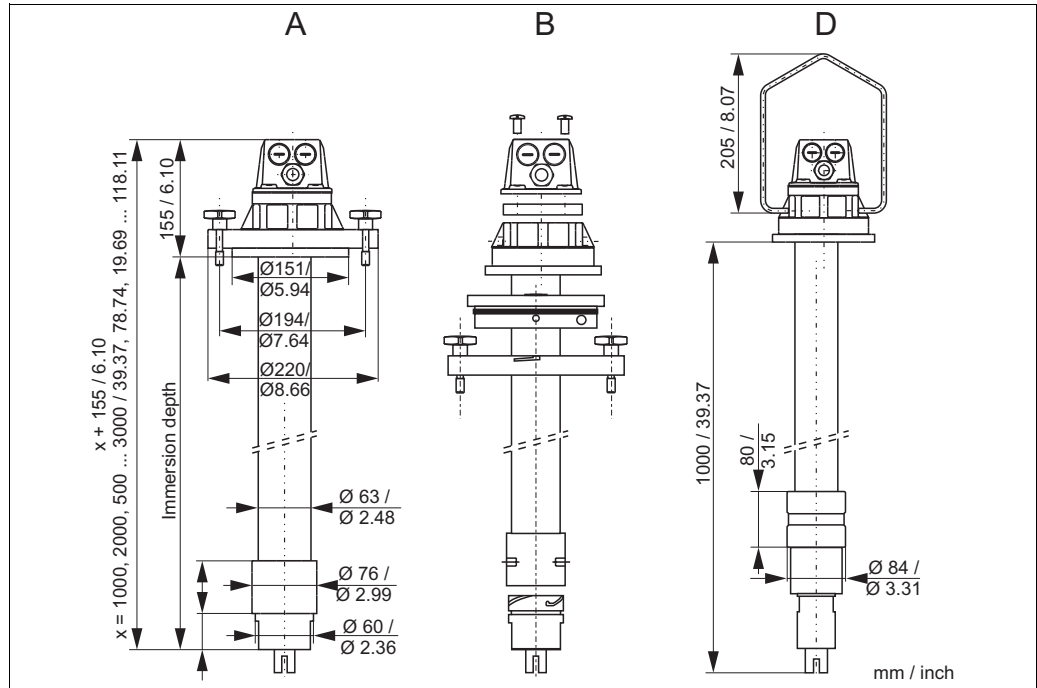

OLA111, DN 100 flange, mounting versions A, B und D

- OLA140
For the inductive sensor OLS50
Immersion assembly with flange connection for high duty processes;
Ordering acc. to the version, see Technical Information
- OLA751 flow assembly

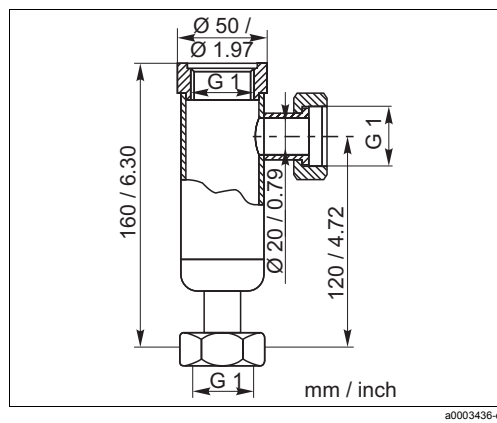

OLA751 flow assembly

For installation of conductivity sensors with G 1 thread.
Inlet (bottom) and outlet (lateral) DN 20 with union nuts G 1.
Stainless steel 1.4571 (AISI 316Ti)
Max. temperature: 160 °C / 320 °F
Max. pressure: 12 bar / 174 psi
Order no.: 50004201


Connection accessories

- OYK71 measuring cable
for use as extension cable between junction box VBM and transmitter, sold by the metre;
order no. 50085333
- Extension cable OLK5
for inductive conductivity sensors, for cable extension via junction box VBM;
(sold by the metre), order no. 50085473
- Junction box VBM
for cable extension, with 10 terminals, IP 65 / NEMA 4X

Cable entry Pg 13.5
Cable entry NPT 1/2"

Order no. 50003987
Order no. 51500177

- Junction box VBA
with 10 high-impedance terminals, protection class: IP 65; material: polycarbonate
order no. 50005276
- Four-pole metal plug M12 for fieldbus connection
order no. 51502184

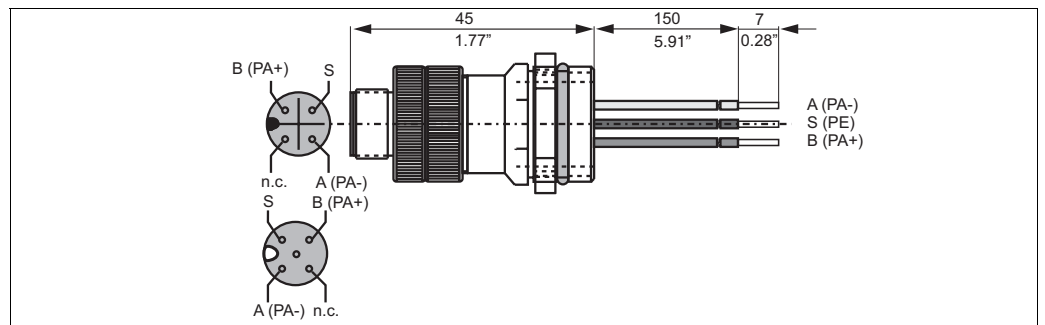


C07-OM12xxx-02-06-00-xx-002.eps

M12 plug with socket

Mounting accessories


- Weather protection cover OYY101 for mounting of field housing, for outdoor installation
material: stainless steel 1.4031;
order no. OYY101-A

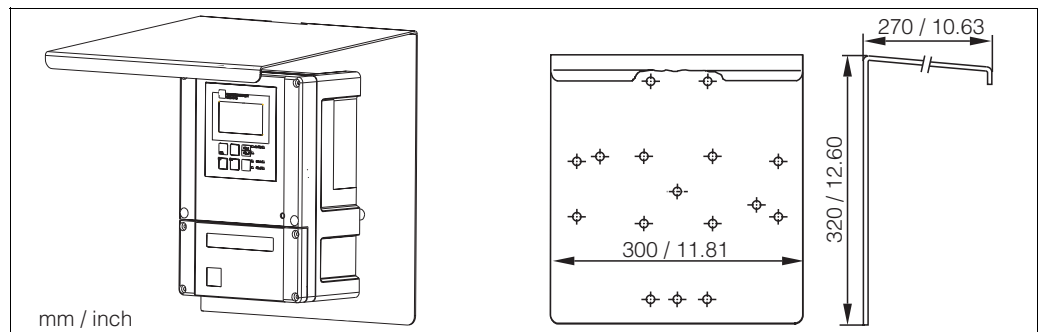

C07-OYY101xx-00-06-00-en-001.eps

Weather protection cover for field instrument


- Kit for mounting of field housing on horizontal or vertical pipes (Ø max. 60 mm (2.36"))
order no. 50086842

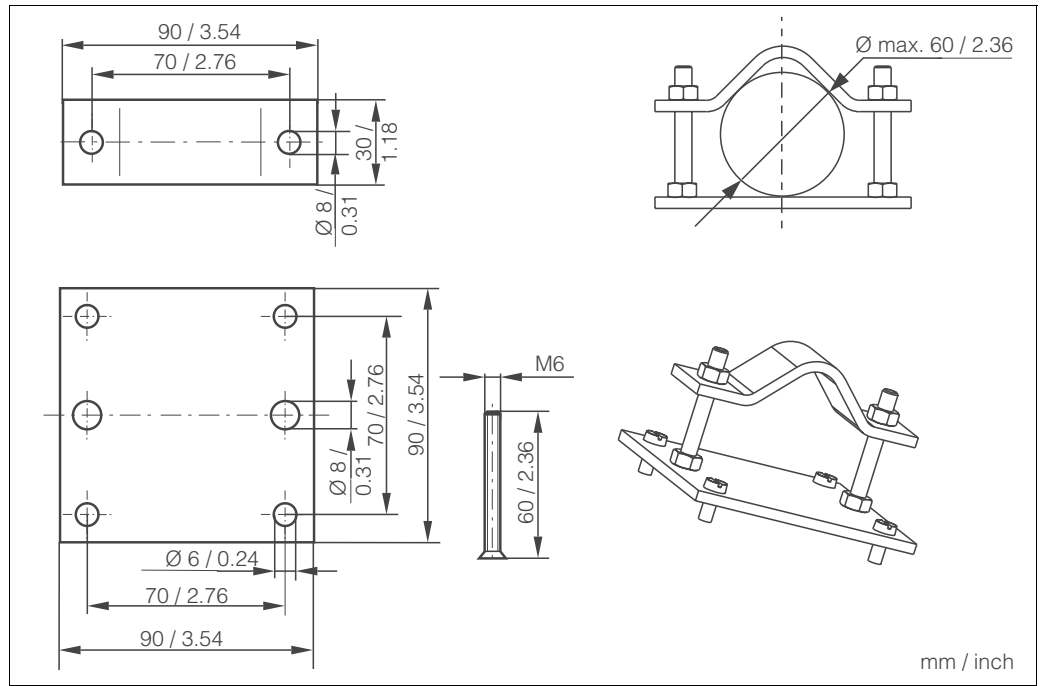

C07-OxM2x3xx-00-06-00-en-001.eps

Pipe mounting kit

- Universal upright post OYY102
Square post for mounting of field housing, material: stainless steel 1.4301;
order no. OYY102-A

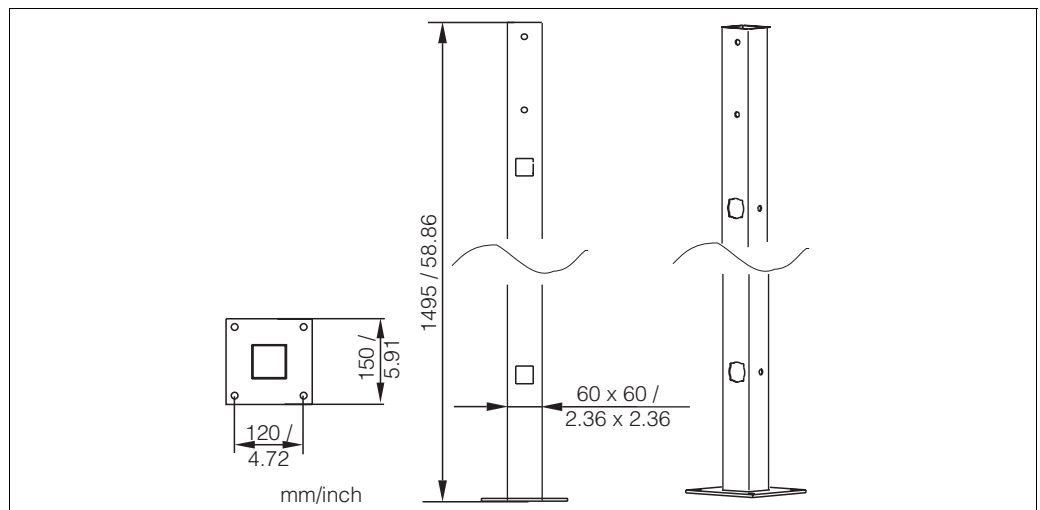

C07-OYY102xx-00-06-00-en-002.eps

Square post OYY102

Buffer solutions

Precision calibration solutions, acc. to SRM (Standard reference material) of NIST, error limit $\pm 0.5\%$, reference temperature 25 °C (77 °F), with temperature table

- OLY11-A, 74.0 $\mu\text{S}/\text{cm}$, 500 ml (0.132 Us.gal); order no. 50081902
 - OLY11-B, 149.6 $\mu\text{S}/\text{cm}$, 500 ml (0.132 Us.gal); order no. 50081903
 - OLY11-C, 1.406 mS/cm, 500 ml (0.132 Us.gal); order no. 50081904
 - OLY11-D, 12.64 mS/cm, 500 ml (0.132 Us.gal); order no. 50081905
 - OLY11-E, 107.0 mS/cm, 500 ml (0.132 Us.gal); order no. 50081906
-

Optoscope

- Optoscope

Interface between transmitter and PC / laptop for service purposes.

The Windows software "Scopeware" required for the PC or laptop is supplied with the Optoscope. The Optoscope is supplied in a sturdy plastic case with all the accessories required.
Order no. 51500650

